





Softlight Square

Product Specifications

Photometric Data



Product Diagram

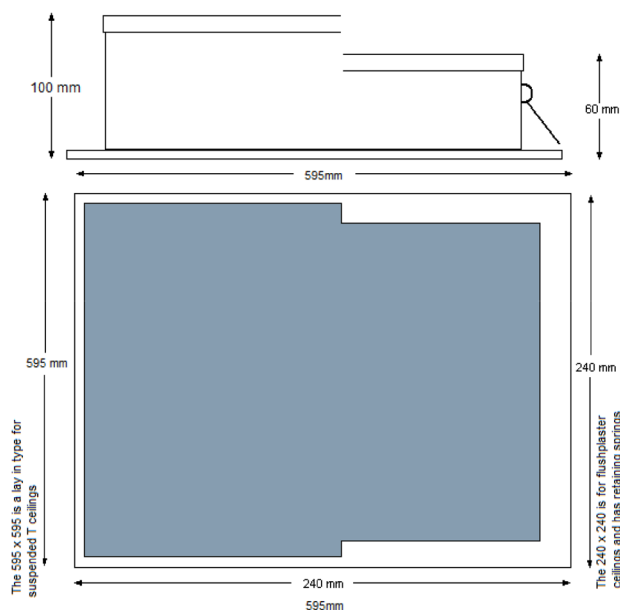

Technical Specifications

	240 x 240	595 x 595
Body construction	Steel powder coated	Steel powder coated
Lens and reflector type	Frosted opal 80% transmission or prismatic clear 90% transmission	Frosted opal 80% transmission or prismatic clear 90% transmission
LED type	Osram or Seoul	Osram or Seoul
Lumen options	1 300 initial less transmission Standard 4500K 80CRI (warm white on request)	Either 3000 lumens or 5000 lumens less transmission - Standard 4500K 80CRI (warm white on request)
Supply voltage	230V AC 50HZ	230V AC 50HZ
Wattage	13W	
IP rating	IP 20	IP 20
Control Type	Standard - no control, on or off DMX control available DALI control available	Standard - no control, on or off DMX control available DALI control available
Installation data	Available along with IES files for Relux	Available alan with IES files for Relux