




LED Floodlight Max


Effect Lighting

Product Specification

Photometric Data

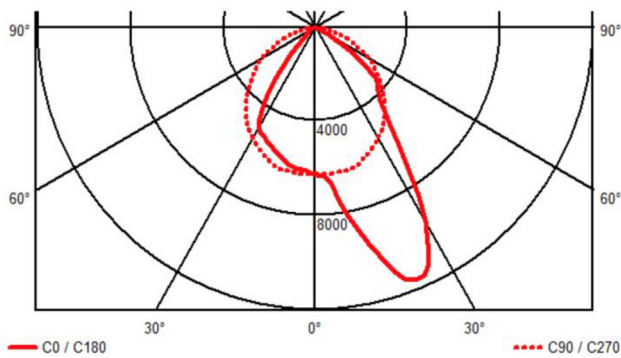

Product Diagram

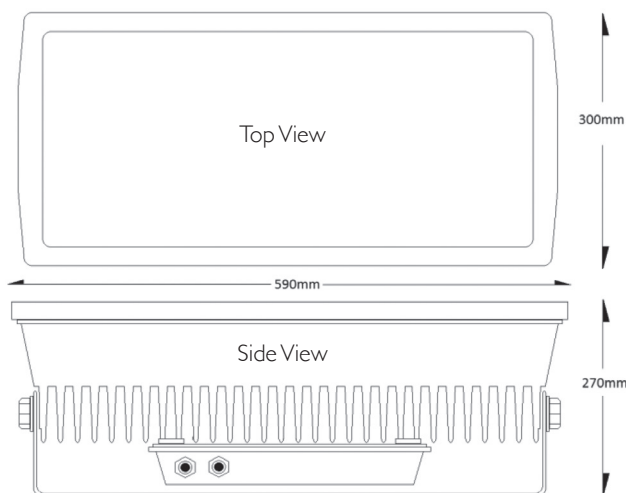

Technical Specifications

	Single Colour	RGBW
Body construction	Die cast LM6 aluminium - powder coated	Die cast LM6 aluminium - powder coated
Front glass cover	4mm heat tempered safety glass.	4mm heat tempered safety glass.
LED type	LG or Seoul in 4000K or 5000K	RGBW High power Luxeon
Lighting performance	31 200 lumens – total circuit load 270W – at 230V incoming AC voltage CRI – 70 Power factor + 0.9	208 W Red – 52W Green – 52W Blue – 52W White – 52W
Supply voltage	230V AC	DMX Colour mixing control required
IP rating	IP 65	IP 65
Installation data	Available	Available

This product is suitable for operation in outdoor and marine environments. (not suitable for submersion)