



ANTLEY

Lights



AL2 Channel

Fluorescent Luminaires

Overview

The **AL2** is a high quality open channel range of fluorescent luminaires, designed for use with T8 (26mm), T5 (16mm) fluorescent lamps and **LED tubes**, offers an excellent lumen maintenance, outstanding efficiency. Slender and versatile design, available in single and double 600mm (2ft), 1200mm (4ft) and 1500mm (5ft) nominal lengths, with roto-lock lamp holders for positive pin location.

Applications

- Distribution Centres
- Factory Lighting
- Storage and warehouse lighting

Specifications


- Body and cover are manufactured from robust 0.8mm cold rolled mild steel finished in a thermosetting powder.
- Designed for T8 and T5 fluorescent lamps.
- Roto-lock lamp holders for positive pin location.
- Available in 600mm (2ft), 1200mm (4ft) and 1500mm (5ft).
- Available for 2ft, 4ft and 5ft LED tubes.
- IEC/SANS 60598 safety mark.
- Easily accessible for electronic control gear.
- For interior applications only.
- Multiple ventilation louvres for heat dissipation.
- Cross bracing for rigidity.
- Welded earth stud connected to a 3 way terminal block.
- End through 20mm Ø knock-out entry each end.
- Suitable for use as a self-contained emergency lighting – maintained mode with 20% light output for one hour duration.

AL2 Channel


Fluorescent luminaires

Product Specification


AL2-136WELB




AL2-158WELB

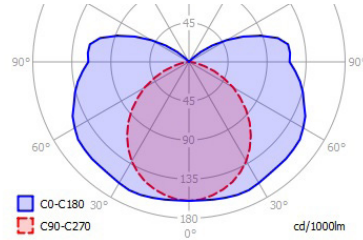

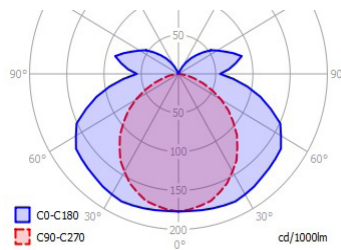


AL2-236WELB

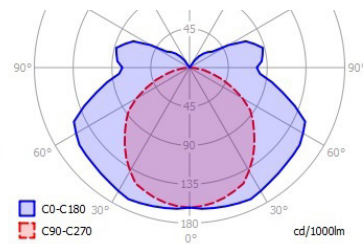

AL2-258WELB



Catalogue Number	Wattage (w)	Length (mm)	Width (mm)	Height (mm)	Circuit watts	Mass (Kg)
AL2-1x18W ELB	18W	625	100	50	18W	1.7
AL2-2x18W ELB	2x18W	625	100	50	36W	1.8
AL2-1x36W ELB	36w	1235	100	50	32W	2.8
AL2-2x36W ELB	2x36W	1235	100	50	64W	3.3
AL2-1x58W ELB	58W	1535	100	50	55W	3.5
AL2-2x58W ELB	2x58W	1535	100	50	110W	4.7
 AL2-600 LED tube	9W	625	100	50	9w	1.7
 AL2-1200 LED tube	18W	1235	100	50	18W	2.8
 AL2-1500 LED tube	24W	1535	100	50	24W	3.5

