



LED High Bay

Product Specification

Photometric Data

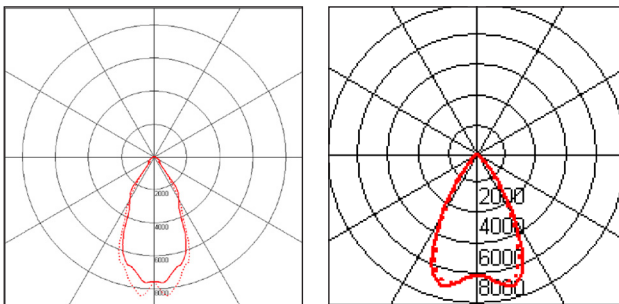

Product Diagram

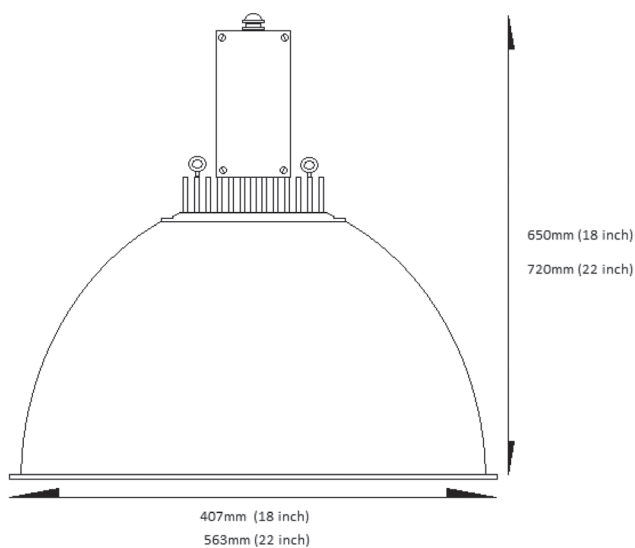

Technical Specifications

	70W	146W
Control chamber	Spun Aluminium -	Spun Aluminium
Reflector	Either acrylic - or anodised aluminium	Either acrylic - or anodised aluminium
LED type	LG or Seoul	LG or Seoul
Lumen options	Neutral white 5000K - 7000lumens Warm white 3000K - 6440lumens	Neutral white 5000K - 14400 lumens Warm white 3000K - 13440 lumen
Supply voltage	230V AC 50HZ	230V AC 50HZ
Wattage	70W total circuit load ????	146W total circuit load
Power factor	Better than 0.85 in normal on/off mode	Better than 0.85 in normal on/off mode
IP rating	IP 20	IP 20
Control Type options	Standard - no control, on or off Dimmable with triac dimming DMX control available DALI control available	Standard - no control, on or off Dimmable with triac dimming DMX control available DALI control available
Installation data	Available along with IES files for Relux	Available along with IES files for Relux