



- 1 - Provision for NEMA base daylight switch
- 2 - Robust stainless steel external clips
- 3 - Custom designed mains incoming cable clamp
- 4 - High performance T-POT one piece high purity aluminium reflector
- 5 - Stay arm for ergonomical maintenance from the top
- 6 - Stainless steel internal diffuser clamps

## Dimensions

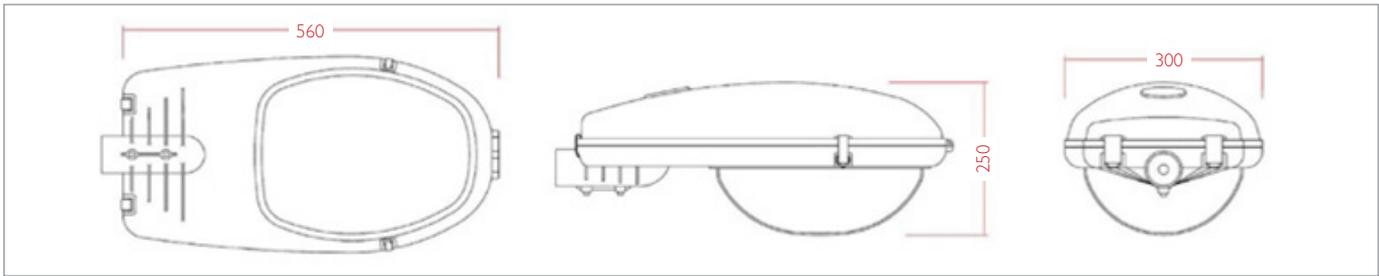

## Photometric Data

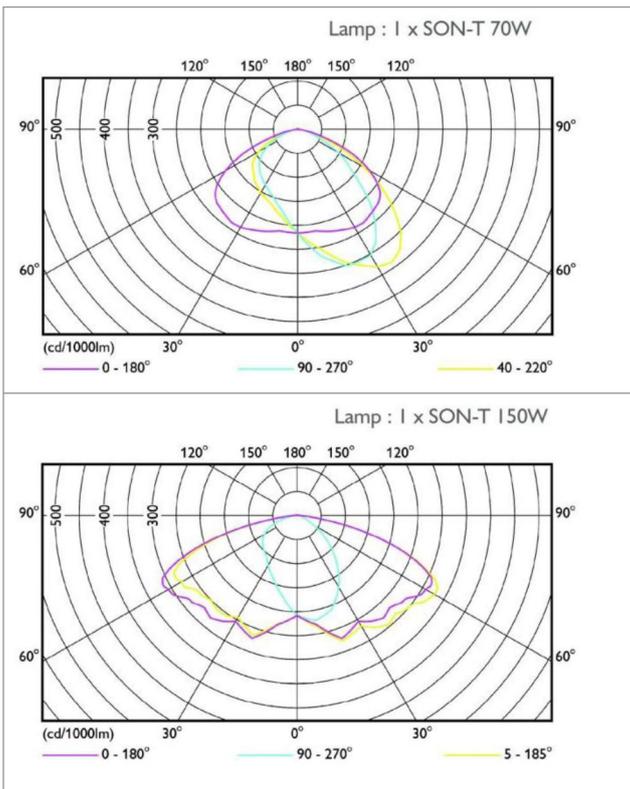

## Ordering Data

Full product name	Lumen	Weight
ECOWAY SON-T 50W	4 000*	4.5
ECOWAY SON-T 70W	6 600*	4.5
ECOWAY SON-T 100W	10 700*	5.0
ECOWAY SON-T 150W	17 500*	5.5
ECOWAY SON-E 50W	3 600	4.5
ECOWAY SON-E 70W/I	5 600	4.5
ECOWAY SON-E 70W/E	5 600	4.5
ECOWAY SON-E 100W	10 200*	5.0
ECOWAY SON-E 150W	14 500	5.5
ECOWAY CDO-TT 70W	6 300	4.5
ECOWAY CDO-TT 100W	8 800	5.0
ECOWAY CDO-TT 150W	13 500	5.5
ECOWAY CDO-ET 70W	5 600	4.5
ECOWAY CDO-ET 100W	8 300	5.0
ECOWAY CDO-ET 150W	12 500	5.5
ECOWAY CDM-T 35W	3 300	4.5
ECOWAY CDM-T 50W	5 000	4.5
ECOWAY CDM-T 70W	6 600	4.5
ECOWAY CDM-T 150W	12 700	4.5
ECOWAY 2*PL-C 26W	3 600	4.5
ECOWAY PL-T 42W	3 200	4.0
ECOWAY PL-T 57W	4 300	4.0
ECOWAY HPL-N 80W	3 700	4.5
ECOWAY HPL-N 125W	6 200	4.5

## Accessories

- BE – bottom entry spigot adaptor
- DLS – incorporated recessed miniature daylight switch
- MCB – incorporated SN2.5kA circuit breaker
- NEMA – daylight switch for use with a NEMA socket
- PITB – plug-in 5-way terminal block

## ANTLEY LIGHTING

581 Chopin Street, Constantia Park, Pretoria East  
PO Box 38794, Garsfontein, 0060

Tel: +27 12 998 3869 | Cell: +27 83 857 8433 | Fax: +27 86 513 3392



[www.antley.co.za](http://www.antley.co.za)